

Liberate Enterprise Applications, Enter the Modern Data Era



The Best NVMe Flash Storage in Businesses of All Sizes

XF3126D provides high performance with μ s-level latency that can meet the response requirements of the most demanding enterprise applications. It is the perfect modern IT solution for database, AI, IOT, HPC, virtualization, and financial services.

Excellent Performance

- 100% NVMe 3U26 high density architecture
- Flexible high-speed 25GbE/ 32Gb iSCSI/Fibre Channel(FC) I/O host card
- Excellent IOPs with ultra-low latency
450K random write IOPs @ 500 μ s latency
220K random write IOPs @ 300 μ s latency

Enterprise-grade Reliability

- 99.9999% high availability design with no single point of failure
- Never lose any data at cache-to-flash memory protection solution
- Always enjoy the latest features & better performance with zero downtime firmware upgrade

Modern Simplicity

- Simplify the steps of upgrading and replacing system components with modular hardware design
- XEVO - the operation system for flash storage reduces learning and maintenance efforts through our innovative interface design
- Support RESTful API, SNMP, and emailing for external management or use QSAN XInsight, smarter data management with simplified platform and intelligent engine

Accelerate Business-Critical Applications

Guaranteed response times rather than one-time peak throughput, QSAN XF3126D with 26bays NVMe architecture achieves the performance requirements of the enterprise high performance computing infrastructures with high IOPs at μ s-level latency.

At low latency, there's no need to be worried about applications that slow down, or worse, stop running due to high response time, and you can speed up computing process by reducing the data transmission time and integrate mixed critical workloads in a flash storage.


Ever Running

The cost of losing confidence from customers is far greater than the cost of IT recovery. XF3126D has built-in hot-swappable and fully redundant hardware design for easy maintenance and upgrade. Dual active controllers concurrently provide storage services in real time and guarantees the non-stop storage service.


Efficiency Management

The flash-based storage management system - XEVO, providing efficiency management capabilities, data can be accessed in just 5 minutes when storage is installed for the first time. With the help of comprehensive and intuitive dashboard and report system, managers are able to analyze business usage and monitor the storage status in real time. Moreover, external manage features such as RESTful API, SNMP and emailing notification enable managers to fully grasp the system status and focus on better decision making.

Appearance

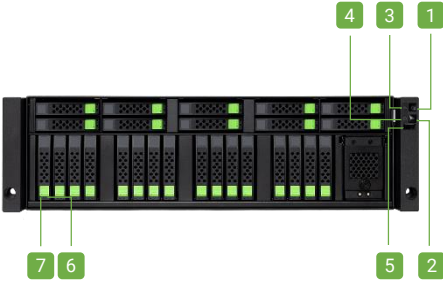

- 1. Enclosure Power Button / LED
- 2. UID (Unique Identifier) Button / LED
- 3. Enclosure Access LED
- 4. Enclosure Status LED
- 5. USB 2.0 Port
- 6. Disk Drive Power LED
- 7. Disk Drive Status LED

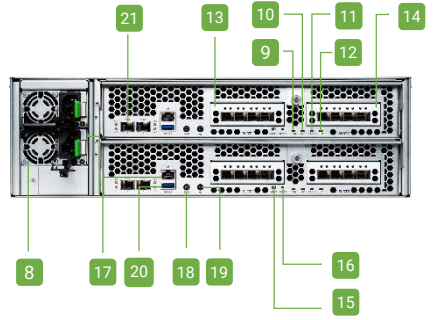

- 8. Power Supply Unit – PSU Indicator and Beep Off Button
- 9. Controller Status LED
- 10. Master / Slave LED (only for dual controllers)
- 11. Dirty Cache LED
- 12. UID (Unique Identifier) LED
- 13. Host Card Slot 1 (host card is an optional part)
- 14. Host Card Slot 2 (host card is an optional part)
- 15. Buzzer Mute Button
- 16. Reset to Factory Default Button
- 17. Management Port
- 18. Console Port
- 19. Service Port
- 20. USB 3.0 Port
- 21. 10GbE iSCSI SPF+ Port

Hardware Spec

| | |
|---------------------------------|--|
| Architecture | Active-Active dual-controller |
| CPU | |
| CPU | Intel® Xeon® 64-bit 6-Core |
| Memory | |
| Memory Module Pre-installed | 8GB DDR4 RDIMM x 2 (per controller) |
| Total Memory Slots | 6 (per controller) |
| Memory Expandable up to | 384GB (per controller) |
| Storage | |
| Drive Bays | 2.5" Slot x 26 |
| Compatible Drive Type | 2.5" U.2 Dual-port NVMe SSD |
| Maximum Internal Raw Capacity | 399.36TB (calculate 15.36TB) |
| Hot Swappable Drive | Yes |
| External Port | |
| USB 2.0 Port | 1 (Front) |
| USB 3.0 Port | 1 (Rear) |
| Others | UPS Port x 1 · Controller port x 1 |
| Connectivity Port | |
| 1GbE RJ45 LAN Port | 1 (Onboard Management Port) |
| 10GbE RJ45 LAN Port | 2 iSCSI (Option) |
| 10GbE SFP+ LAN Port | 2 iSCSI (Onboard) / 4 iSCSI (Option) |
| 25GbE SFP28 LAN Port | 2 iSCSI (Option) |
| 16Gb SFP+ Fibre Channel | 2 (Option) / 4 (Option) |
| 32Gb SFP28 Fibre Channel | 2 (Option) |
| Host Card Expansion | |
| PCIe Expansion | 2 x Gen3x8 |
| Appearance | |
| Dimension (H x W x D) (mm) | 132 x 482.6 x 687.6 mm |
| Chassis Form Factor | Rackmount 3U 26 Bay |
| Net Weight (kg) | 25.6kg |
| Gross Weight (kg) | 34kg |
| Memory Protection | |
| Cache-to-Flash Module | Yes |
| Others | |
| System Fan per controller | 4 (per controller) |
| Replaceable System Fan | Yes |
| Power Recovery | Yes |
| Wake on LAN/WAN | Yes |
| Power Supply Unit / Adapter | 800W x 2 (80 PLUS Platinum) |
| Redundant Power Supply | Yes (hot-swappable) |
| AC Input Power Voltage | 100V-240V |
| Power Frequency | 50-60 Hz, Single Phase |
| LCM Support | Yes |
| Environment Temperature | |
| Operating Temperature | 0°C to 40°C |
| Storage Temperature | -15°C to 55°C |
| Operating Relative Humidity | 20% to 80% non-condensing |
| Non-operating Relative Humidity | 5% to 95% |
| Certification | CE, FCC, BSMI |
| Standard warranty | 3 years Cache-to-Flash Module: 1 year |

