



SANbox[®] 5800V/5802V

Fibre Channel Stackable Switch

What's New?

- **8Gb / “8Gb-ready” performance at affordable prices** – Backwards compatible with 4Gb and 2Gb devices and optics!
- **“Always on” 10Gb stacking ports** – no extra cost to activate your storage networking backbone!
- **20Gb ISL bandwidth on demand** – Prepare for the future without paying more today!
- **Preferred Service included** – 24 x 7 call support plus next-business-day hardware exchange
- **Fabric Security now included!**
- **NPIV support for virtualized environments**
- **Higher port density**

Same Great SANbox 5000 Series Value

- **Cost-saving modular backbone architecture**
 - Stability
 - Scalability, adaptability
 - Extended solution lifespan
- **4-port expansion increments**
- **Easy to install and manage**
 - QuickTools™ On-board GUI and CLI included
 - Adaptive Trunking included
- **Powerful advanced software options**
 - Enterprise Fabric Suite™ 2007
 - SANdoctor™
- **Still the most cost-effective, best-performing SAN switch available!**



Next-Generation SANs for Today's Infrastructure

The newest addition to QLogic's award-winning SANbox[®] 5000 Series unleashes powerful data access possibilities for small to large enterprise customers. SANbox 5800V stackable switches offer SAN planners the best choice to cost-effectively handle current needs while preparing for known and unknown competitive business requirements tomorrow.

- Affordable entry as low as eight 8Gb device ports – plus four “always on” 10Gb stacking ports included (*12 ports total*)
- 20Gb Inter-switch Link (ISL) bandwidth on demand – as needs change, upgrade your stacking ports to the *World's Fastest Fibre Channel!*
- Full backwards-compatibility with existing 4Gb and 2Gb infrastructure
- Expandable to twenty 8Gb device ports per switch (*24 ports total*) – or 120 device ports per multi-switch stack.
- Choice of cost-optimized single power supply (SB5800V) or high availability dual power supply (SB5802V) models

Migrate to 8Gb at Your Own Pace

Thanks to widespread corporate plans for server virtualization/consolidation, along with the rapid adoption of multi-core processors, many SAN users are already feeling the need for 8Gb network speeds. At a minimum, savvy IT managers know they must take the 8Gb transition into account when making their next equipment purchases.

However, these same customers—and others who are not yet ready for 8Gb – also demand a solution that can be installed alongside *existing* infrastructure without requiring large “up front” payments for capabilities that may be needed later.

QLogic's field-proven modular backbone architecture, a key component of the QLogic SAN lifecycle management framework, offers a powerful answer to this dual request, allowing customers to build SANs that will last far into the future while simultaneously providing the lowest cost of entry. SANbox 5800V reduces both capital expense (CAPEX) and operating expense (OPEX) through all phases of technology roll-out.

Next-Generation Stacking: A Good Idea Gets Better!

SANbox 5800V lets you connect 8Gb, 4Gb or 2Gb devices to a SAN for about the same cost as competing 4Gb-only solutions – but the investment protection advantages go much deeper! Unlike other solutions, the 5800V offers the ability to *phase* bandwidth provisioning incrementally within your ISL fabric, the most performance-critical area of the SAN.

1. Start with “Always On” 10Gb ISLs

Each SANbox 5800V ships with all four 10Gb stacking ports active by default. Basic inter-switch connectivity is now included with the product! Customers no longer need to take ISL port costs into account when planning their SANs – every port they purchase may now be connected directly to a server or storage device! (See sidebar for more on stacking.)

At their default 10Gb setting, the four stacking ports provide over 50Gb additional bandwidth per switch – the equivalent of six extra 8Gb ports!

10Gb ISL speed provides more than enough bandwidth for customers in the early stages of their 8Gb migration, when many switch ports will still be attached to 4Gb storage and other legacy devices.

2. 20Gb Bandwidth On-Demand

When a majority of SANbox device ports are eventually connected to actual 8Gb devices, additional inter-switch bandwidth may be desired. At that point, customers may non-disruptively upgrade the ISL ports on one or more switches to 20Gb – the *World’s Fastest Fibre Channel*. 20Gb, the only ISL technology that perfectly complements 8Gb device speeds, extends the stability, cost-savings, and performance benefits of a true backbone architecture to next-generation SANs.


IT managers now have all the network headroom they need to deploy new applications and technologies with confidence. Best of all, since 20Gb uses the same cables/connectors as 10Gb, customers can upgrade their entire SAN at the click of a mouse – *without touching a cable or purchasing any new hardware*. Only QLogic offers such a cost-deferred “pay-as-you-grow” plan for the 8Gb transition.

Easy to Install and Manage

- **Installation and configuration wizards** – From basic switch setup to advanced zoning and extended distance configuration, the SANbox 5800V has automated routines to make deployment a snap. Installation is a 3-step point-and-click process. Self-configuring switch ports automatically adjust to 8Gb, 4Gb, or 2Gb device speeds.


What Is Stacking?

Stackable switches, long familiar to Ethernet users, were introduced for Fibre Channel by QLogic in 2003. Stacking *cuts complexity and costs* by providing a stable, highly-expandable transport for aggregate ISL traffic – eliminating the disruption, port waste and management hassles associated with using device ports as ISLs.

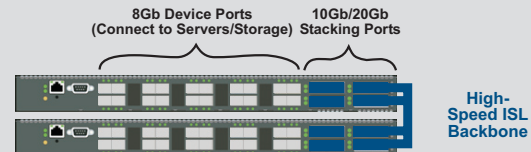

True Backbone Value

In a stackable architecture, each switch features dedicated ports for inter-switch links (ISLs) – that is, for connecting to other switches. These ports run at a much higher bandwidth than the regular data/device ports, and therefore require far fewer connections to achieve specific bandwidth goals.

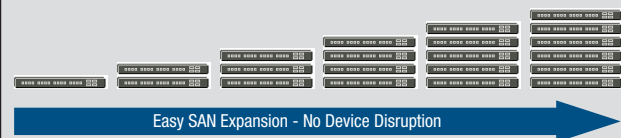

Need more server or storage ports? Simply add another switch to the stack – no need to move existing cables or disrupt devices.

Affordable Now – Big Savings Later

- **Low initial cost** – Out of the box, dual-speed SANbox 5000 products provide superior performance at a price-per-port competitive with single-speed, non-stacking edge switches.
- **Reduced expansion costs** – Multi-switch SANbox networks require *up to 50% fewer switches* to achieve the same device port counts. And since each stacking port matches the throughput of three device ports, SANbox ISL connections are far less expensive per unit of bandwidth. For instance, a single 20Gb connection (25.5 Gbps actual line rate, 51 Gbps full-duplex) saves *six* 8Gb device ports for devices – and eliminates the need for *six* expensive 8Gb SFPs. Stacking has never made more sense from a budget versus performance perspective!
- **Longer product and topology lifespan** – Other vendors force customers to take a non-linear “rip and replace” approach to SAN growth, offering a limited solution at the low end, followed by a radically different architecture as the installation matures. QLogic’s modular ISL backbone helps customers pace investments and deployment activities *predictably* over time, with fewer wrong turns and reversals – even when corporate strategies and directions change.

- **On-board Graphical User Interface (GUI)** – No software to load. Just point a web browser at any switch and manage the entire fabric from that location. No matter what your level of expertise, the web-based QuickTools interface has all you need for basic fabric management. And for advanced administration of larger SANs, the optional Enterprise Fabric Suite application provides an unprecedented level of intuitive granular control.
- **Stack management** – With Enterprise Fabric Suite, users can manage stacks of 5000 series products as a single device, loading firmware, applying security configuration changes, or handling user and Simple Network Management Protocol (SNMP) administration for up to six switches simultaneously.

Fast, Reliable Performance

- **Full bandwidth architecture** – The QLogic SANbox 5800V provides uncontested, “wire speed” bandwidth at every port – a total of 544 Gbps per switch! Plus, the dedicated 10Gb/20Gb ISL transport makes it easy to create non-blocking *multi-switch* configurations. ISL capacity expands automatically as device port count grows, ensuring a consistent user experience over time.
- **Adaptive Trunking** – No extra cost or complicated license schemes. QLogic Adaptive Trunking optimizes ISL use and performance by pooling the capacity of multiple 20Gb, 10Gb, or 8Gb links into a single high-speed pipeline. Trunks are automatically invoked as needed, eliminating the need for manual configuration. Unlike other trunking implementations, trunked ports do not need to be sequential, and may even be spread across multiple switches. Switch-on-exchange design supports Intelligent Path Selection, Fabric-Shortest-Path-First, and Virtual Trunking.

A variety of reliability features make the SANbox 5800V capable of delivering overall system availability greater than 99.999%.

- **I/O StreamGuard™ RSCN suppression** – guaranteed bandwidth for time-sensitive applications such as video streaming.
- **Hardware-enforced zoning by Worldwide Name**
- **Hot-swappable dual power supply options**
- **Non-Disruptive Code Load and Activation (NDCLA)**

Powerful, Intuitive Software

QLogic implements the same code base for the entire SANbox product line, including the popular SANbox 9000 chassis switch. Not only are SANbox products backward and forward-compatible, you'll only need to learn one set of management tools.

- **QuickTools** – Embedded Java® web applet for device discovery, device management, zoning, and fabric management. QuickTools

includes a configuration wizard and QLogic Drag-and-Drop zoning, the industry's most intuitive zoning method.

- **Fabric Security (now included)** – Provides the right mix of advanced protection features for user, connection, and device security. This includes support for RADIUS authentication, Secure Shell (SSH), and Secure Socket Layer (SSL) encryption. Device connection security uses Fibre Channel Security Protocol (FC-SP), DH-CHAP, and FC-GS-4 CT.
- **Enterprise Fabric Suite (optional CD software)** – Reduce software costs while managing the SAN *your* way with unprecedented levels of control. Enterprise Fabric Suite bundles high-value enterprise features such as Fabric Tracker, Performance View, Port Threshold Alarms, Stack Management, and mPort™ movable port activation into a single site-licensed package. You'll spend less time and money licensing individual features or worrying about “balloon payment” per-switch fees as your SAN grows.
- **SANdoctor (optional)** – Comprehensive set of diagnostic tools for trouble-shooting problems in your fabric. SANdoctor includes media digital diagnostics, fabric trace-route, and fabric ping.

Interoperability

- **Fully compatible with other SANbox switches** – mix and match in stacks with all 5000 Series products (2Gb, 4Gb or 8Gb). The SANbox 5800V is also compatible with FC-SW-2-compliant switches from other vendors.
- **Interoperable with all major storage, server, application and infrastructure vendors.** SNMP support, available API and SMI-S agent for integration into popular third-party management applications.

Virtualization Support

- **N_Port ID Virtualization (NPIV) support** comes standard across the entire QLogic switch portfolio, allowing full integration and interoperability with applications such as VMware®, and hardware including leading transparent blade solutions from IBM®, HP®, and others. Only QLogic delivers end-to-end NPIV support on Host Bus Adapters (HBAs) and switches.

Investment Protection

SANbox 5800V provides low TCO, extended product life-span, and a phased “pay-as-you-grow” approach that will enhance any company's long-term financial strategy. Make business-critical applications and personnel more productive with a next-generation QLogic SAN, the best choice for today's infrastructure – and tomorrow's.

SANbox® 5800V/5802V Fibre Channel Stackable Switch

Scalability

Ports per chassis

- Eight to twenty 8-Gbps ports (upgradable in 4-port increments)
- Four 10/20-Gbps XPAK MSA-compliant ports (10-Gbps default; upgradable to 20-Gbps)

Multi-switch fabric support

- All topologies including: stack, cascade, cascaded loop, and mesh
- Multiple 10/20Gb or 8Gb links between switches
- Adaptive trunking, intelligent path selection

Port types

- All ports are universal, auto-discovering, self-configuring, and assume the following states: F_Port, FL_port, E_port, G_Port, GL_Port

Performance Features

Fabric port speeds

- 2/4/8-Gbps, 10/20-Gbps full-duplex. All ports auto-negotiate with slower devices or ports.
- Fabric latency less than 0.2 µs
- Cut-through routing

Fabric point-to-point bandwidth

- 1700 MBps full-duplex on 8-Gbps ports
- 5100 MBps full-duplex on 20-Gbps ports

Aggregate bandwidth

- 544 Gbps per chassis
- Non-blocking architecture

Maximum frame sizes

- 2148 bytes (2112 byte payload)

Per-port buffering

- ASIC-embedded memory (non-shared)
- Guaranteed 16 credit multi-read port buffer for full performance up to 13km @ 2-Gbps and 2 km @ 10-Gbps
- Extended distance through credit donation

Media

- Hot-pluggable, industry-standard 3.3 volt SFP+ transceivers for 8-Gbps ports
- Hot-pluggable, industry-standard XPAK optics or copper stacking cables for 10/20-Gbps ports
- Compatible with 4-Gbps and 2-Gbps SFPs

Supported SFP types

- Shortwave/longwave (optical), active copper

Maximum Media transmission ranges

- Device ports (@ 2-Gbps)
 - Shortwave optical: 500 m (1,640 ft.)
 - Longwave optical: 10 km (6.2 mi.)

- Stacking ports (@ 10-Gbps)
 - Shortwave optical: 300 m (984 ft.)
 - Longwave optical: 2 km (1.2 mi.)

Cable types

- 50/62.5 micron multimode fiber optic
- 9 micron single-mode fiber optic

Interoperability

- Compatible with FC-SW-2 compliant switches including Brocade®, Cisco®, and McDATA®
- Management interoperability with leading SAN management applications

Fabric Management

Management methods

- QuickTools web applet
- Command Line Interface
- Enterprise Fabric Suite 2007 (optional)
- API, GS-4 Management Server (including FDMI), SNMP, RADIUS, FTP, TFTP, SMI-S.

Access methods

- 10/100 Ethernet BaseT (RJ45), serial port (RS-232 with DB9), in-band (Fibre Channel)

Diagnostics

- Power-On Self Test (POST)
- Optional SANdoctor fabric diagnostics software

Fabric services

- Simple name server, hardware based zoning, Registered State Change Notification (RSCN), I/O StreamGuard, multi-chassis in-order delivery, automatic path selection, FDMI, NPIV support, IPv6 support

User interface

- LEDs, command-line console, and web utilities

Mechanical/Power/Cooling

- 5802: Dual, hot-swap power supplies/fans; 5800: Single integrated power supply
- Optional rail mount kit
- Front-to-back air pattern
- RoHS compliant

Dimensions

- H x W x D: 43.2 x 432 x 500 mm (1.7 x 17 x 20 in)

Weight

- 5802: 8.16 kg (18 lbs); 5800: 6.8 kg (15 lbs)

Environmental and Equipment Specifications

Operating

- Temperature: 5° to 40°C (41° to 104°F)
- Humidity: 10% to 90% non-condensing
- Altitude: 0 to 10,000 feet
- Vibration: 5-500 Hz, 0.27g, 5 sweeps
- Shock: 3.5g, 3ms, half sine, 20 repetitions

Non-operating

- Temperature: -20° to 70°C (-4 to 158 °F)
- Humidity: 10% to 95% non-condensing
- Altitude: 0 to 50,000 feet
- Vibration: 2 to 200 Hz, 0.5g, 5 sweeps
- Shock: 50g, 4216 mm/s, 13msec, 3 axis

Electrical

- Voltage: 100 to 240 VAC; 50 to 60Hz
- Power load: 1 A at 120 VAC; 0.5 A at 240 VAC
- Power consumption:
 - 5802: 80W nominal; 90W typical max
 - 5800: 73W nominal; 83W typical max

Agency Approvals—Product Safety

- US/Canada: UL/cUL, 60950-1
- Europe: EN60950, CB Scheme-IEC 60950-1, CE, TUV, Low Voltage Directive
- Russia: GOST R

Agency Approvals—EMI/EMC

- Meets Class A emissions and immunity requirements for USA, Canada, Europe, Australia, New Zealand, Korea, Japan

SANbox® 5800V/5802V Fibre Channel Stackable Switch



For information about supported SAN standards and classes of service, visit www.qlogic.com/sanstandards.

Europe Headquarters QLogic (UK) LTD. Quatro House Lyon Way, Frimley Camberley Surrey, GU16 7ER UK +44 (0) 1276 804 670

The Ultimate in Performance

Corporate Headquarters QLogic Corporation 26650 Aliso Viejo Parkway Aliso Viejo, CA 92656 949.389.6000

www.qlogic.com

© 2009 QLogic Corporation. Specifications are subject to change without notice. All rights reserved worldwide. QLogic, the QLogic logo, SANbox, QuickTools, Enterprise Fabric Suite, SANdoctor, I/O StreamGuard, mPort, and vFabric are trademarks or registered trademarks of QLogic Corporation. Java is a registered trademark of Sun Microsystems, Inc. HP is a registered trademark of Hewlett-Packard Company. IBM is a registered trademark of IBM Corporation. VMware is a registered trademark of VMware, Inc. All other brand and product names are trademarks or registered trademarks of their respective owners. Information supplied by QLogic Corporation is believed to be accurate and reliable. QLogic Corporation assumes no responsibility for any errors in this brochure. QLogic Corporation reserves the right, without notice, to make changes in product design or specifications.